



GUIDE FOR SPARE BALL DRILLING


DRILLING: This MOTIV™ Drilling Guide provides a basic layout option. We expect that pro shop professionals have extensive knowledge of various drilling procedures and techniques for fine tuning ball layout.

IMPORTANT: 1. All holes must be beveled after drilling. 2. Check side and top weights to ensure compliance with USBC specifications.

BALL CLEANING: Clean after every bowling session to maintain full performance. We also recommend using a towel to removing lane oil from the ball surface during play. This reduces oil saturation and maximizes the life of the ball. Power Gel® Clean is a powerful bowling ball cleaner that is recommended for MOTIV™ equipment.

STORAGE: Extreme temperatures may damage MOTIV™ bowling balls. Do not store in an area where temperatures will drop below 40°F or rise above 125°F.

BASIC LAYOUT: The CG will be very close to the PIN on a MOTIV spare ball, NOT 180 degrees from the PIN. Many times, the CG mark may even be on the PIN. Simply place the PIN/CG at the center of grip.

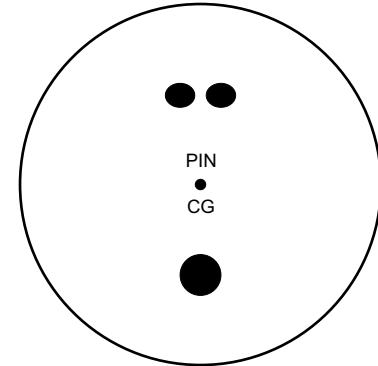

GET MOTIVATED™